

STS03-2

Lessons Learnt from Chimera Method Application to a Deploying Krueger Device

Apurva Hasabnis¹, Hans Maseland², Frédéric Moens³, Aleš Prachař⁴ & Jochen Wild¹

¹DLR – German Aerospace Center, Braunschweig, Germany, uhura@dlr.de

²Royal NLR – Netherlands Aerospace Centre, Amsterdam, The Netherlands,
hans.maseland@nlr.nl

³ONERA – French Aerospace Lab, Meudon, France, frederic.moens@onera.fr

⁴VZLU – Czech Aerospace Research Centre, Prague, Czech Republic, prachar@vzlu.cz

Key Words: *Aerodynamics, Unsteady, High-Lift Systems, CFD, Chimera, Overset Methods.*

The Chimera method [1] is an established method for simulation of overlapping grids. Meshing parts independently has made this method popular for complex geometries as well as moving bodies like propellers and rotors (e.g. [2]) or control surfaces (e.g. [3]). It is thus a promising method to simulate deflecting high-lift systems.

The motion of the Krueger flap – as the most promising leading edge high-lift system device for laminar wing technology – is characterized by a relatively large movement (about 140 deg deflection) at a relatively high deflection speed (up to 200 deg/s) compared to classical leading edge devices. In terms of simulation, the grid properties of the overlapping mesh regions vary throughout the motion from a nearly sealed retracted position to a gapped flow in fully deflected position comparable to a slat device. This expects dynamic effects may get dominant and a valid simulation of this flow is needed for proper design and analysis.

In the frame of the UHURA project¹, several partners applied their CFD capabilities based on Chimera in order to validate the method for this specific application in comparison to wind tunnel tests. The presentation outlines the different Chimera approaches ranging from structured/2D to hybrid/3D in steady and unsteady simulations for the different type of setups investigated, namely straight and swept wing with full-span and part-span Krueger flap. It summarizes common challenges and best practice for application of the Chimera approach for such a device.

REFERENCES

- [1] Steger, J. L., Dougherty, F. C. and Benek, J. A., "A Chimera Grid Scheme," *Advances in Grid Generation*, K. N. Ghia and U. Ghia, eds., ASME FED-Vol. 5, June, 1983.
- [2] Meakin, R.L. Moving body overset grid methods for complete aircraft tiltrotor simulations. AIAA paper 1993-3350, 1993.
- [3] Blanc, F. Roux, F.-X., Jouhaud, J.-C and Boussuge, J.-F., "Numerical Methods for Control Surfaces Aerodynamics with Flexibility Effects." International Forum on Aeroelasticity and Structural Dynamics, 2009

¹ The project leading to this presentation has received funding from the European Union's Horizon 2020 Research and Innovation Framework Programme under grant agreement No 769088.

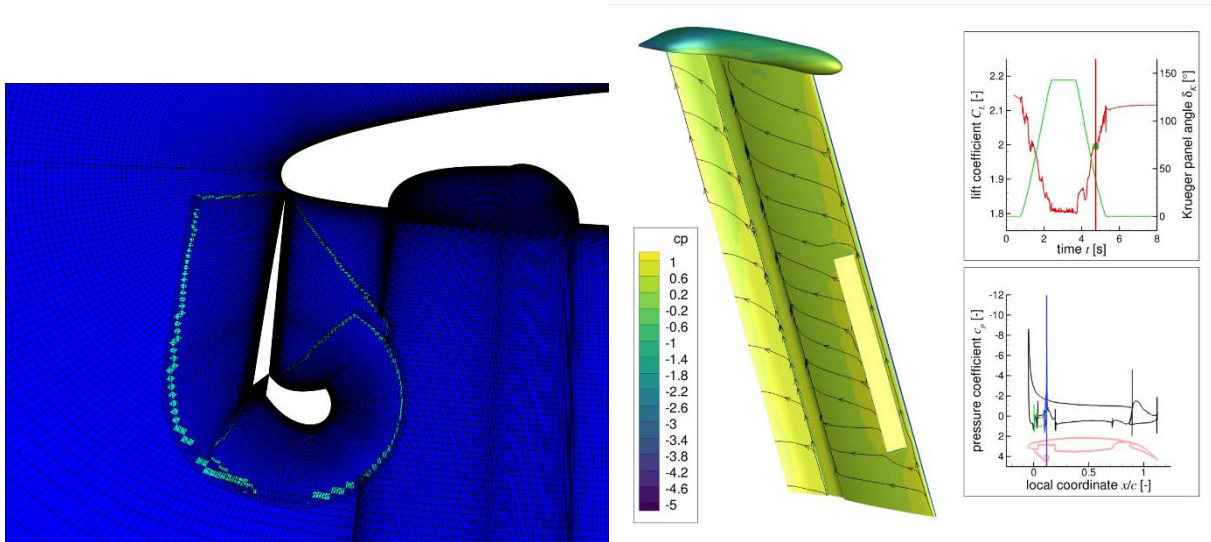


Figure 1: Chimera grid application for the deployment of a Krueger flap: (left) image of section through structured Chimera mesh with half deployed Krueger(courtesy NLR); (right) unsteady RANS simulation applying Chimera for DLR-F15S swept wind tunnel model with part span Krueger flap partially deployed (courtesy DLR)